

65 Watt Universal 2-Wire Input Adapter

Meets CEC and 2007 Energy Independence Security Act

NetBit®

www.NetBit.com



Features

- Low Cost
- Efficiency Level IV Compliant
- Class B EMI
- No Load Power Consumption <0.5W
- Slim Low Profile Design

Applications

- Laptop Computers
- Ebook
- Networking
- Portable Equipment

Safety Approvals

- cUL/UL EN60950-1
- CE
- TUV EN60950-1
- FCC

Mechanical Characteristics

- Length: 132mm
- Width: 57.5mm
- Height: 17mm
- Weight: 240g

Output Specifications

Model	DC Output Voltage	Load		Ripple(1) P-P(max)	Regulation		Efficiency Level
		Min.	Max.		Line	Load	
KSUS 0651900342M2	+19V	0A	3.42A	180mV	±5%		IV

(1) Measured by pass capacitors 0.1uF/ 100uF at output connector terminal and oscilloscope set at 20 Mhz

NetBit reserves the right to make changes without further notice. Please consult NetBit and visit www.netbit.com for the most up to date specifications.

INPUT:

AC Input Voltage Rating
100-240 VAC

AC Input Voltage Range
90 to 264 VAC

AC Input Frequency
47/63 Hz

Input Current
1.6A @ 100VAC
0.8A @ 240VAC

Leakage Current
3.5mA Max. @254VAC 60Hz

Inrush Current (cold)
90A Max @ 100VAC
150A Max. @ 240VAC
(Cold start at ambient 25° C)

Input Power Saving
<0.5W at no load

OUTPUT:

Efficiency
85% minimum average efficiency

Hold-up time
>10mS

Over-current Protection

Circuit will latch

Short Circuit Protection

Auto-reset when short is removed

ENVIRONMENTAL:

Temperature

Operation 0°C to +40°C
Non-operation -20°C to +80°C

Humidity

Operation 5% to 90%

Emissions

FCC Class B
EN55022 Class B


RELIABILITY:

MTBF 50k Hr. @ ambient 25°C

DC Output Connector

2.5 x 5.5mm Center Positive

Dimension Diagram Unit: mm

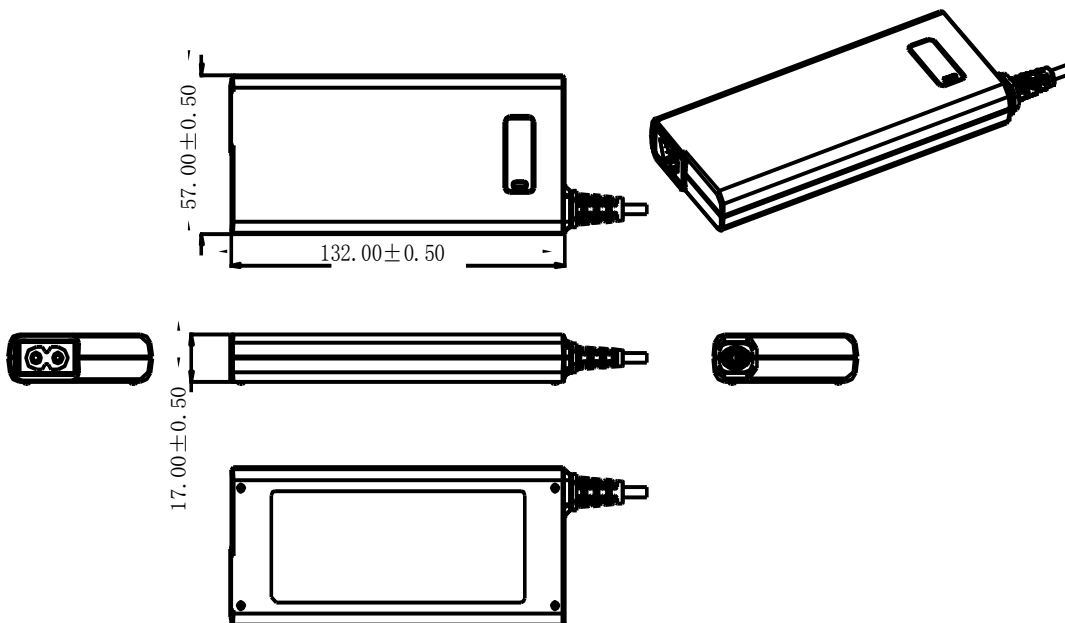

NetBit®
"We **Power** Your Idea"